ONBIPV

P12DG755HJT

- Suitable for C&I Market
- MBB Technology, Anti PID
- Better energy generation performance
- N-type TOPCon solar module guarantees long-term reliability



12-year Product Warranty

30-year Linear Power Output Warranty

- IEC61215/IEC61730/UL61730
- IEC61701/IEC62716/IEC60068
- IEC62941/IEC62804
- ISO9001:2015: Quality Management System
- ISO14001:2015: Environment Management System
- ISO45001:2018: Occupational health and safety management system

ONBIPV

PG12DG755HJT

24.30%	0~+3%	1%	0.30%
MAX MODULE EFFICIENCY	POWER TOLERANCE	FIRST YEAR POWER DEGRADATION	YEAR 2-25 POWER DEGRADATION

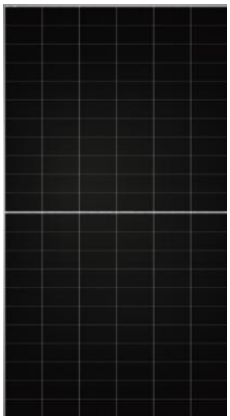

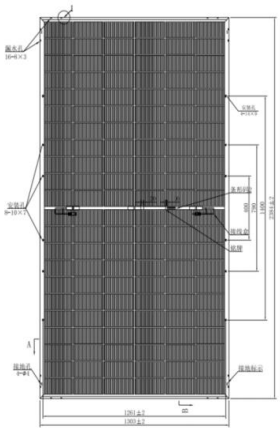

All Dimensions in mm,
The drawing is a graphical representation of the product,
For engineering quality drawings please contact ONBIPV

Electrical Characteristics (STC/NOCT)

STC: AM1.5 1000W/㎡ 25℃ NOCT: WS1m/s 800W/㎡ 20℃

Module Type	755W
Maximun Power - (Pmax/W)	755/576
Open Circuit Voltage - Voc(V)	50.16/47.87
Short-Circuit Current - Isc(A)	19.06/15.24
Voltage at Pmax - Vmp(V)	42.13/40.25
Current at Maximum Power(I)	17.92/14.32
Module Efficiency - Lm(%)	24.30

Mechanical Parameters

Cell Orientation	Monocrystalline 0BB210 (6×22)
Junction Box	Protection level IP68
Output Cable	4mm², 300mm
Glass	2.0mm, Anti-reflection coating glass 2.0mm, Hightransparency solar glass
Frame	Alloy steel frame
Weight	37.5kg
Dimension	2384*1303*30mm
Packaging	37pcs per pallet / 333pcs per 20'GP/666pcs per 40'HC

Optional

Connector	Original MC
Cable length	1400mm
Frame	Anodized aluminum
Glass	Black

Operating Parameters

Operating Temperature	-40℃~+85℃
Power Output Tolerance	0~3W
Voc and Isc Tolerance	0-±3%
Maximun System Voltage	1500V DC-[H]
Maximun Series Fuse Rating	35A
Nominal Operating Cell Temperature	44±2℃
Protection Class	Class II
Fire Rating	UL type 1 or 2 IEC Class C

Temperature Ratings(STC)

Temperature Coefficient of Isc	+0.040%/℃
Temperature Coefficient of Voc	-0.220%/℃
Temperature Coefficient of Pmax	-0.240%/℃

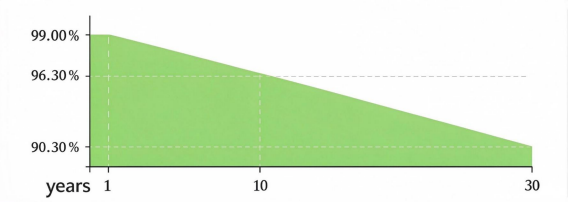

Copyright © Nanjing Onbipv Technology Co., Ltd. Add: No. 103, Rheinland Wealth Plaza, Tianyuan Road, Nanjing, China.

Information in this datasheet are subject to update without notice. Onbipv reserves the right of final interpretation.